

EPAGE

NOZZLE CLEANING PROCEDURES


STEP # 1

TURN WASHER OFF AND SQUEEZE TRIGGER GUN TO RELIEVE ANY TRAPPED PRESSURE. REMOVE NOZZLE FROM END OF LANCE.



STEP # 2

USING A SMALL PIECE OF WIRE OR A TIP CLEANER FROM AN ACETYLENE TORCH. CAREFULLY INSERT IT INTO THE END OF THE NOZZLE FORCING ANY OBSTRUCTION OUT.

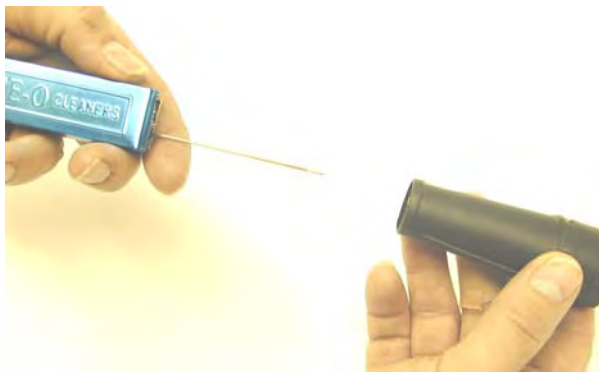

STEP # 3

BACK FLUSH WITH WATER. USING BLUE LOCTITE OR TEFLON TAPE REASSEMBLE THE NOZZLE TO THE LANCE.

