


NYLOTEK

NYLON PROTECTIVE SLEEVE

MEETS OR EXCEEDS ISO 6945 STANDARDS



PART #	NOMINAL ID (IN) "B" DIMS.	OUTSIDE FLAT (IN) "A" DIMS.
NPS-071	0.71	1.19
NPS-077	0.77	1.25
NPS-090	0.90	1.50
NPS-100	1.00	1.66
NPS-114	1.14	1.88
NPS-125	1.25	2.03
NPS-130	1.30	2.13
NPS-138	1.38	2.25
NPS-153	1.53	2.50
NPS-159	1.59	2.56
NPS-175	1.75	2.81
NPS-185	1.85	3.00
NPS-207	2.07	3.31
NPS-225	2.25	3.63
NPS-238	2.38	3.81
NPS-264	2.64	4.25
NPS-296	2.96	4.75
NPS-334	3.34	5.31
NPS-366	3.66	5.81

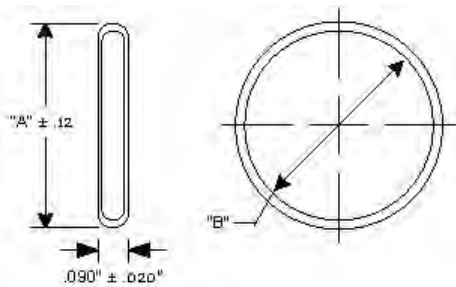

TECHNICAL FEATURES

- Made of bulk continuous filament nylon
- MSHA accepted
- Thickness is .090" ±.020" doubled flat
- Color is black as standard but can be ordered as a special in other colors
- Ambient Temperatures of 250° Max
- Passes FMVSS 302 horizontal flame test
- Packaged in 100' and 300' rolls. Cut lengths are available upon request

BENEFITS

- Excellent protection for hoses from abrasion and cuts
- Useful for bundling 2 or more hoses
- Provides protection to operators of equipment from hot hydraulic fluids in the event of hose failures
- Reduces downtime by extending life cycles of hoses
- Easy to install-allows rubber hose to move freely inside sleeve
- Can be applied over cables, chains, or springs to protect paint finishes
- Priced per foot for ease of ordering

RECOMMENDATIONS

- Use band clamps or nylon cable ties to secure sleeve
- Heat treat cut ends to prevent fraying
- If hose has fittings installed, a larger diameter sleeve may be required
- For customers with large order requests that need other logos printed on sleeve please contact Customer Service for pricing and delivery information



600 S. SIOUX BLVD.
P.O. BOX 800
BRANDON, SD 57005

PHONE: (605) 582-7221
FAX: (605) 582-7222
WATS: 1-800-827-1610